

UCD-461

DisplayPort™ 1.4a & HBR3 Video Generator & Analyzer 32GB



DP 1.4 LL CTS

HDCP 2.3 CTS

8K Video Generator and Analyzer

UCD-461 is a video generator and analyzer unit for testing DisplayPort™ sink and source devices up to 8K@60 Hz (with DSC), 8K@30 Hz and 4K@120 Hz video modes with HBR3 max bit rate capability. UCD-461 offers support for DSC, FEC and LTTPR. HDCP 1.3 and HDCP 2.2/2.3 are also supported. Any video format, audio format, frame rate, video timing, and infoframes can be played by UCD-461. There are no restrictions on the output of video formats.

8K Dolby Vision™ and Dolby Audio

Unigraf's UCD-461 is a 8K Dolby Vision and Dolby Audio test tool. Compared to UCD-400, UCD-461 offers an extended 32GB memory which enables the verification of 8K Dolby Vision content. With the Dolby SW package, UCD-461 is a mandatory tool for any monitor manufacturer that is willing to have a Dolby Vision™ certificate on their products.



Validation Tool

VESA requires Link Layer and HDCP compliance testing as part of the DisplayPort testing requirement for certification. UCD-461 is a compliance test tool for testing DP 1.4a Link Layer including DSC on DP sinks and sources. It is also a HDCP 2.2/2.3 compliance test tool for DP transmitters and receivers.

Highlights

- DP 1.4a Test Equipment
- 8K Dolby Vision™ Test Tool
- Extended Memory 32GB
- Embedded PC
- DP 1.4a Link Layer CTS Tool for Sinks and Sources
- HDCP 2.2/2.3 CTS Tool for Transmitter and Receivers
- HDCP 1.3 & HDCP 2.2/2.3 support
- DP 1.4a features:
 - » HBR3 output and input
 - » MST support (4 streams)
 - » DSC, FEC and LTTPR support
- USB-C output with supplied converter



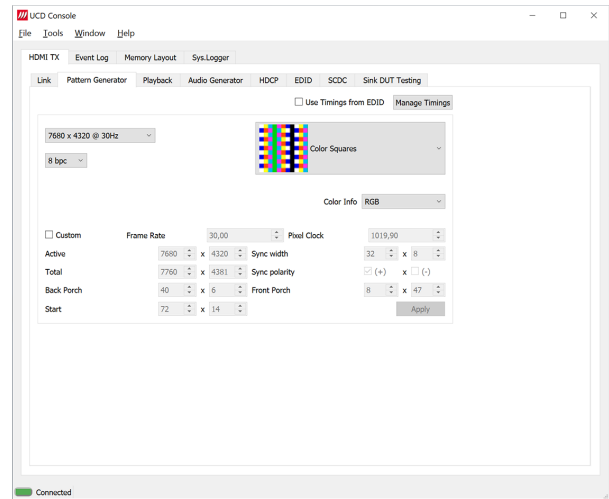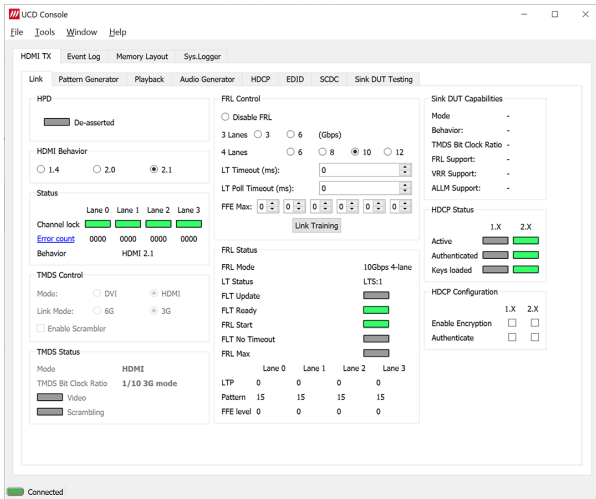


UCD Console

UCD Console Software with easy-to-use GUI enables users to monitor and control all vital functionalities of DP 1.4a interface. With built-in pattern generator and video capture function you can test sink devices up to 8K@30Hz with uncompressed video. The GUI provides users with control and visual presentation of DP link status and configuration up to 4 lanes. Dolby Vision™ scenarios can be played back in UCD Playback integrated into UCD Console. UCD Playback can combine info frames, video frames and audio packets. They are all separate files providing full flexibility to customize the scenario. Additional functionalities include video and audio pattern generator, data logger for AUX and metadata content, link and DPCD register monitoring and control dialogs, EDID editor, HDCP status and control functions etc.

Embedded Windows PC

UCD-461 contains an embedded Windows PC that has 32GB of memory and 500GB of SSD storage. Dolby Vision™ content can be stored on the SSD. Users will be able to operate UCD Console on the embedded PC in UCD-461 device with a monitor, keyboard and mouse of user's choice connected straight to the device.

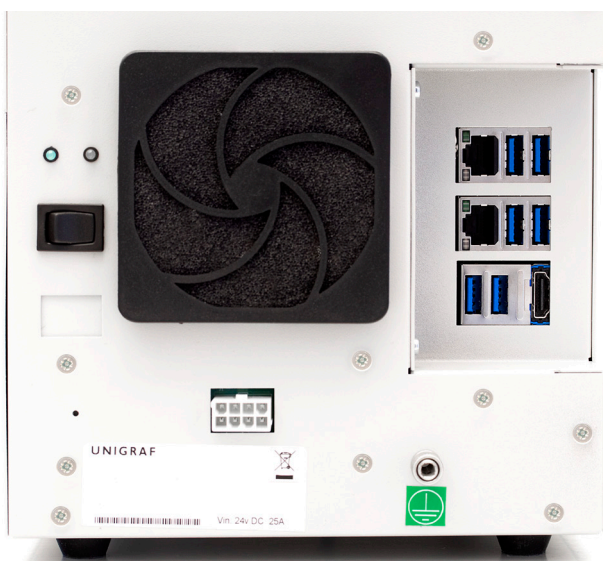

Specifications

Product Number	066616
Input	DP 1.4a (8K@60Hz with DSC / 8K@30Hz) (DP RX)
Output	DP 1.4a (8K@60Hz with DSC / 8K@30Hz) (DP TX)
DP 1.4a Features	DP 1.4a LL CTS, HDCP 2.2/2.3 CTS, MST, LTTPR
Content Protection	HDCP 1.4, 2.2, 2.3
Additional features	DSC 1.2a, FEC,
Operating System	Windows 10
Software	UCD Console GUI TSI API with interface specific test sets
PC Connectors	6 x USB 3.0 2 x Ethernet 1 x HDMI
Power Input	AC/DC Power supply 100 to 240 Vac 50/60 Hz input, +12 Vdc output
Module Size	329 x 188 x 215 mm
Weight	3.9 kg w/o power supply