

# UCD-462

## HDMI 2.1 - 10K Video Generator & Analyzer 32GB



### 10K Video Generator & Analyzer

UCD-462 is a video generator and analyzer for testing HDMI 2.1 interface up to 10K video modes. Resolutions supported are 4K@120Hz, 8K@60Hz and 10K@30Hz with uncompressed video, and 10K@60Hz with DSC. UCD-462 offers support for FEC, DSC and eARC. HDCP 1.4 and HDCP 2.2/2.3 are also supported. Any video format, audio format, frame rate, video timing, and inframes can be played by UCD-462. There are no restrictions on the output of video formats.

### 8K Dolby Vision™ and Dolby Audio


Unigraf's UCD-462 is a 8K Dolby Vision and Dolby Audio test tool. Compared to UCD-422, UCD-462 offers an extended 32GB memory which enables the verification of 8K Dolby Vision content. With the Dolby SW package, UCD-462 is a mandatory tool for any e.g. television or monitor manufacturer that is willing to have a Dolby Vision™ certificate on their products.

### Enhanced Gaming Features

Check the availability of enhanced gaming features on sink devices that support Variable Refresh Rate (VRR) and Auto Low Latency Mode (ALLM). Check full range of VRR from 40 Hz to 120 Hz. Ready-made scenarios for VRR and ALLM testing are available in the UCD-462. By supporting these enhanced gaming features, the UCD-462 is an essential test tool for display manufacturers.

### Highlights

- HDMI 2.1 Test Equipment (FRL/TMDS)
- 8K Dolby Vision™ Test Tool
- Extended Memory 32GB
- Embedded PC
- Variable Refresh Rate (VRR)
- Auto Low Latency Mode (ALLM)
- Forward Error Correction (FEC)
- HDCP 1.4 & HDCP 2.2/2.3 Support
- DSC Support
- eARC Support

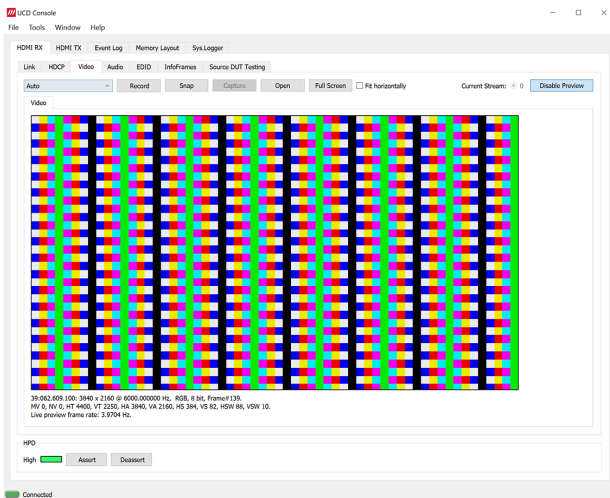

## UCD Console


UCD Console Software with easy-to-use GUI enables users to monitor and control all vital functionalities of HDMI 2.1 interface. With built-in pattern generator and video capture function you can test sink and source devices up to 10K@30Hz with uncompressed video. The GUI provides users with control and visual presentation of FRL status, FRL configuration and Link status up to four lanes. Dolby Vision scenarios can be played back in UCD Consoles playback integrated into UCD Console. UCD Playback can combine info frames, video frames and audio packets. They are all separate files providing full flexibility to customize the scenario.

## Fixed Rate Link (FRL)

Fixed Rate Link (FRL) is the new video transport method in HDMI 2.1. The UCD-462 can identify interoperability issues on FRL capable source and sink devices. Users can verify if an image is captured correctly on the UCD Console when testing source devices using different FRL modes.

## Embedded Windows PC

UCD-462 contains an embedded Windows PC that has 32GB of memory and 500GB of SSD storage. Dolby Vision content can be stored on the SSD. Users will be able to operate UCD Console on the embedded PC in UCD-462 device with a monitor, keyboard and mouse of user's choice connected straight to the device.

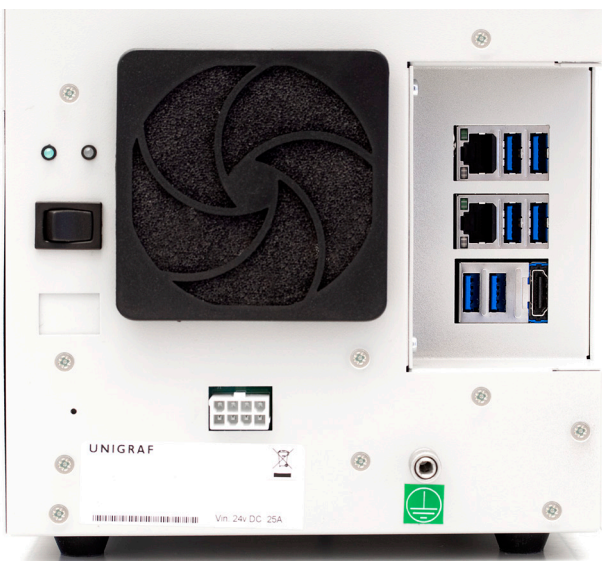

## Specifications

Product Number	066614
Input	HDMI 2.1 (10K@60Hz with DSC /10K@30Hz) (HDMI Rx)
Output	HDMI 2.1 (10K@60Hz with DSC /10K@30Hz) (HDMI Tx)
HDMI 2.1 Features	FRL, TMDS, ALLM, VRR
Content Protection	HDCP 1.4, 2.2, 2.3
Additional features	DSC 1.2a, eARC, FEC
Computer Interface	USB 3.0
Operating System	Windows 10
Software	UCD Console GUI TSI API with interface specific Test Sets
PC Connectors	6 x USB 3.0 2 x Ethernet 1 x HDMI
Power Input	AC/DC Power supply 100 to 240 Vac 50/60 Hz input, +12 Vdc output
Module Size	329 x 188 x 215 mm
Weight	3.9 kg w/o power supply